

# Driver for Windows Vista Installation Guide


## Before setting up

- Prepare the following for setup:
  - 1) Windows Vista or Windows Vista x64 Edition operating system
  - 2) Printer Driver Disk (this disk) or driver data downloaded from Web site.
- When setting up, log on with an Administrator account.
- <Windows needs your permission to continue> may be displayed in the <User Account Control> dialog box during the setup process. If so, select <Continue>.
- If the FUJITSU DL3850+ printer driver has already been set up, delete it and set up again.
- This guide includes procedures on installing printer drivers on locally connected PC's.  
For installation methods on network connection and shared printers, refer to the Windows Vista user's manual or "help".
- In the setup methods below, "Start" refers to the Windows logo in the bottom left of the desktop.

## Using Plug & Play

Require: Be sure to turn off the power to both the computer and the printer.


- a. Make sure that the printer is connected to the computer, and then turn on the power to the printer.
- b. Make sure that the printer is online, and then turn on the power to the computer and start Windows Vista or Windows Vista x64 edition.
- c. If the printer is detected successfully, "Windows needs to install driver software for your FUJITSU DL3850+" will be displayed in the <Found New Hardware> dialog box.
- d. Select <Locate and install driver software (recommended)>.

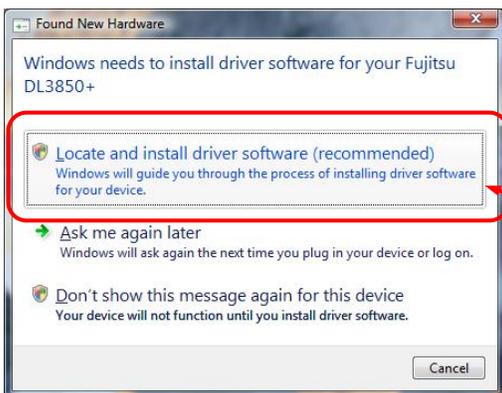


Click




- e. When "Insert the disc that with your FUJITSU DL3850+" is displayed, insert the printer driver disk in the CD-ROM.
  - \*\* If the setup disk has already been inserted in the drive before this window is displayed, the <Next> button will be displayed, so click the <Next> button.
  - \*\* To use the latest version of the printer driver downloaded from our Website, select "-> I don't have the disc. Show me other options." and then go to step "g".

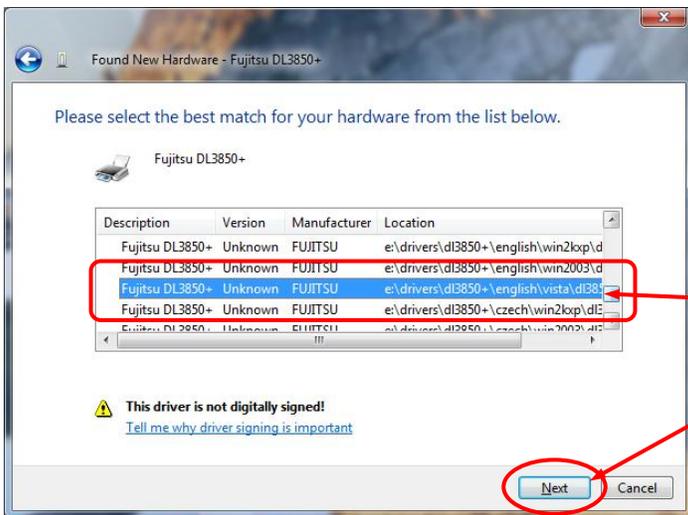


- f. When "Please select the best match for your hardware from the list below." is displayed, select the driver in the "D:\Drivers\DL3850+\English\Vista" folder for the <Location> description, and then click the <Next> button. Go to step "i".
  - \*\* In this example, the CD drive is drive D:. If another letter is being used for the CD drive letter, change the drive letter accordingly.

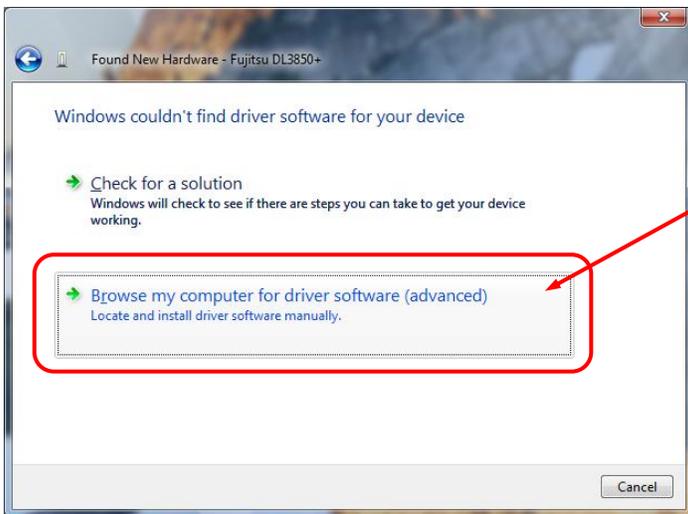

- g. When the <Windows couldn't find driver software for your device> window is displayed, click <Browse my computer for driver software (advanced)>.

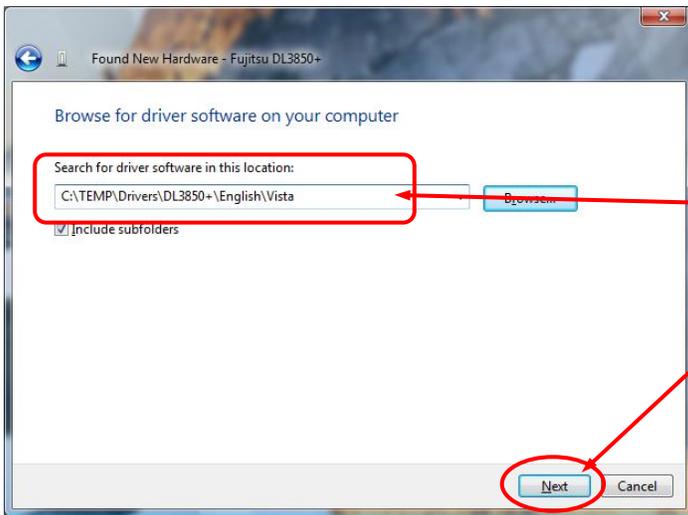


h. When the "Browse for driver software on your computer" window is displayed, enter "(name of the folder containing the downloaded driver data) \Drivers\DL3850+\English\Vista" in the <Search for driver software in this location:> field, and then click the <Next> button.

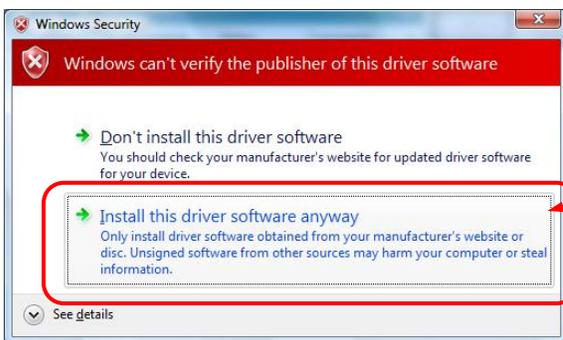

i. "Windows can't verify the publisher of this driver software" will be displayed in the <Windows Security> dialog box, but select "-> Install this driver software anyway".

j. The plug-and-play wizard will start copying the files.

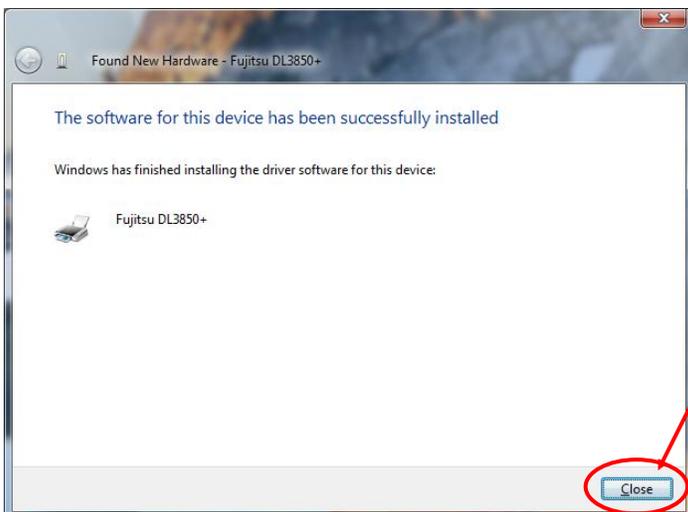


k. When the <Found New Hardware - FUJITSU DL3850+> is displayed, make sure that the message "The software for this device has been successfully installed" is displayed, and then select <Close>.

This completes the setup procedure for the printer driver.


## Setup method using Add Printer Wizard (without using Plug & Play)


Set up the printer by running the Add Printer Wizard.  
The procedure described here assumes that Windows Vista or Windows Vista x64 Edition is already running.

- a. Select "Start" -> "Control Panel" -> "Hardware and Sound" -> "Printers".
- b. Select <Add a printer> from the printer folder.

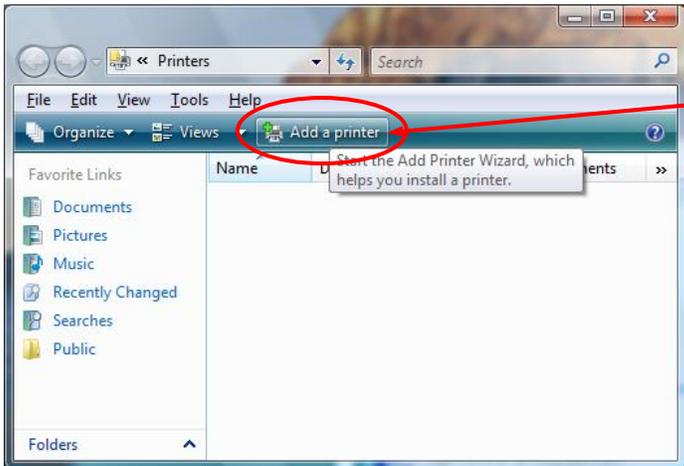


- c. Select <Add a local printer> when the <Add Printer> wizard is displayed.

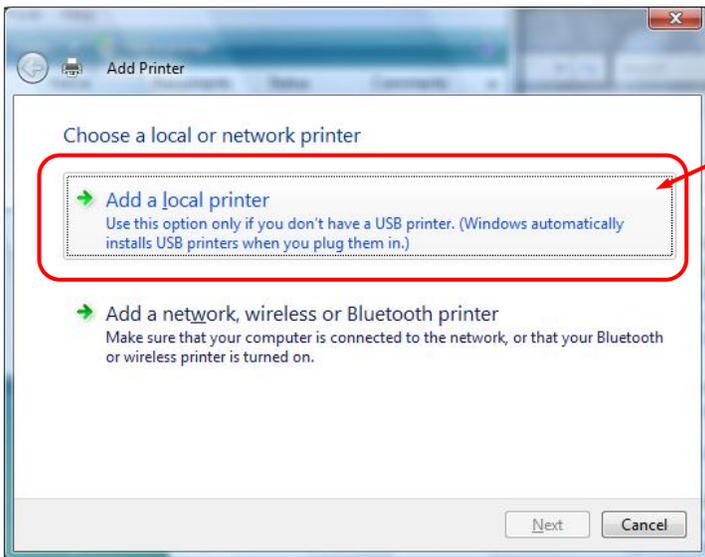

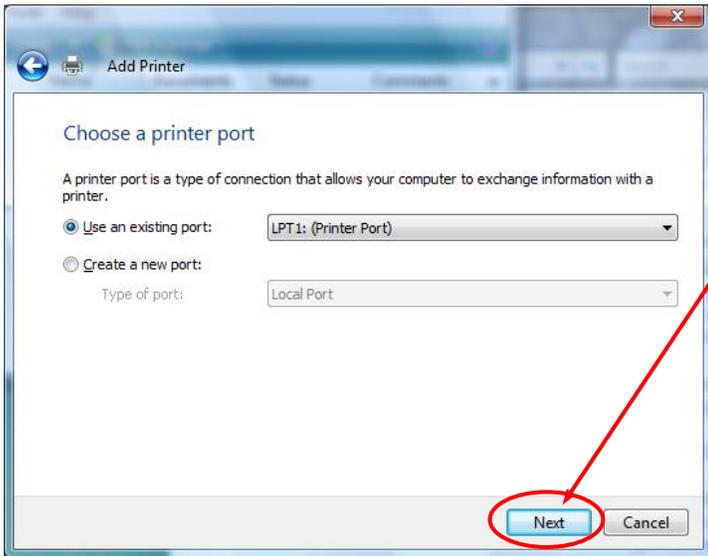


d. Specify which port the printer will connect to, and then click the <Next> button.

*Click*

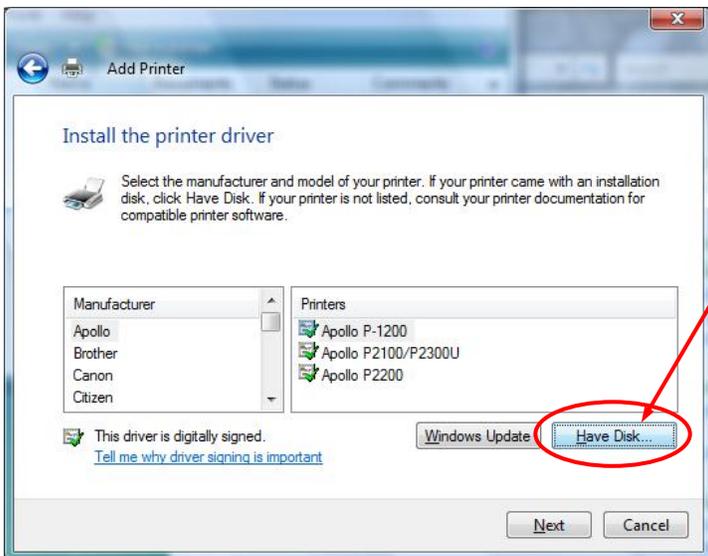

e. Select <Have Disk> when the <Install the printer driver> screen is displayed.

*Click*

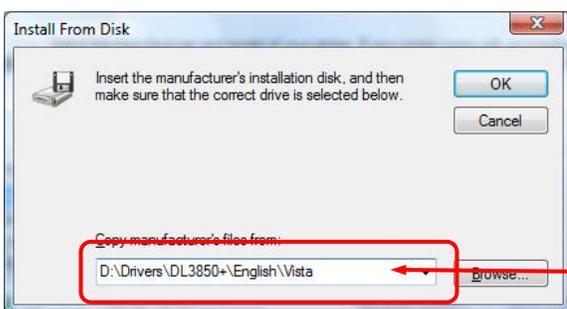


f. Insert this disk in the CD drive (D:) and change the path from "A:\\" to "D:\Drivers\DL3850+\English\Vista".

\*\* In this example, the CD drive is drive D:.

If another letter is being used for the CD drive letter, change the drive letter accordingly.


\*\* To use the latest version of the printer driver downloaded from our web site, select the folder which stores the downloaded data.

*Input*

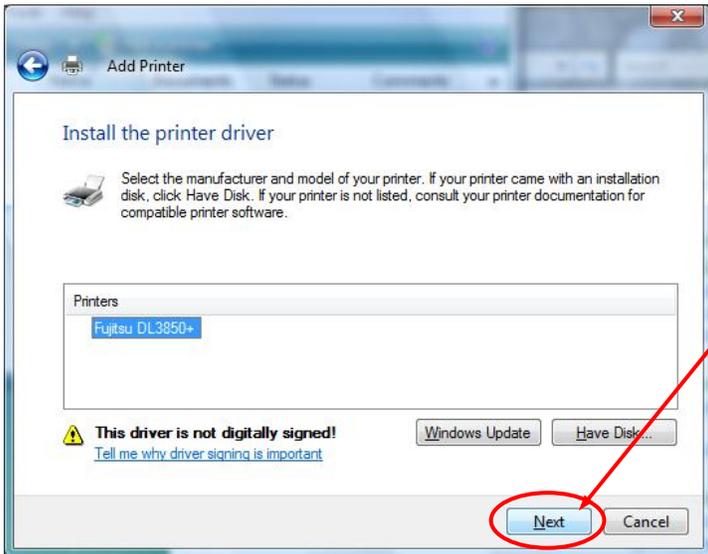


- g. Several model names will be displayed in a list box. Select the model to be used, and then click the <Next> button.  
\*\* If "Which version of the driver do you want to use?" is displayed, select <Replace the current printer>.

*Click*

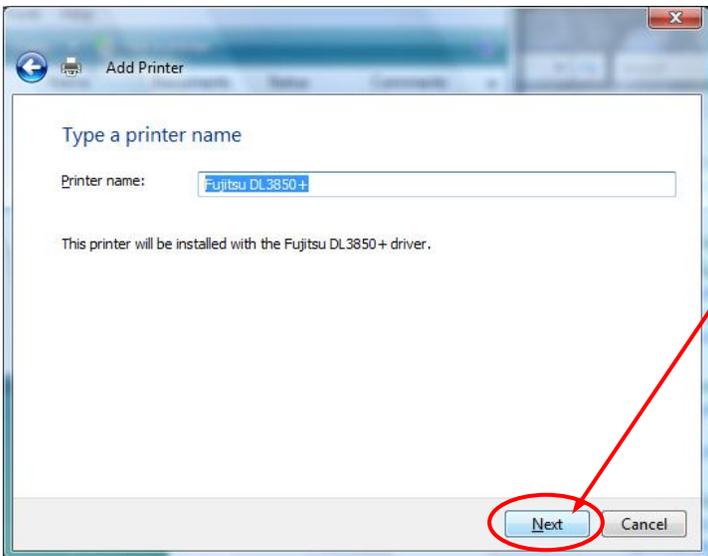

- h. When the <Type a printer name> window is displayed, enter the printer name (to change the printer name, enter the new printer name), make settings for the default printer, and then click the <Next> button.


*Click*

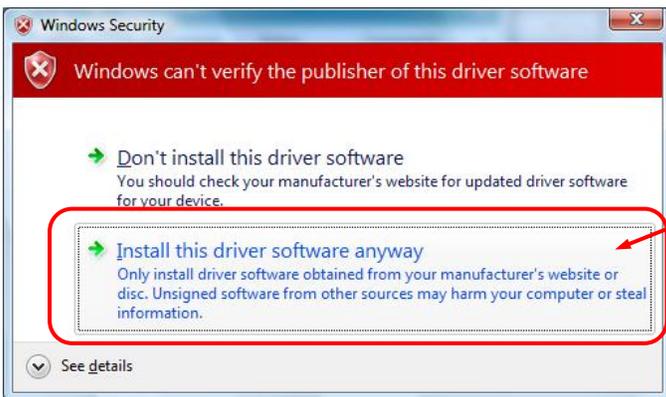


- i. "Windows can't verify the publisher of this driver software" will be displayed in the <Windows Security> dialog box, but select "-> Install this driver software anyway".

*Click*

- j. The wizard will start copying files.

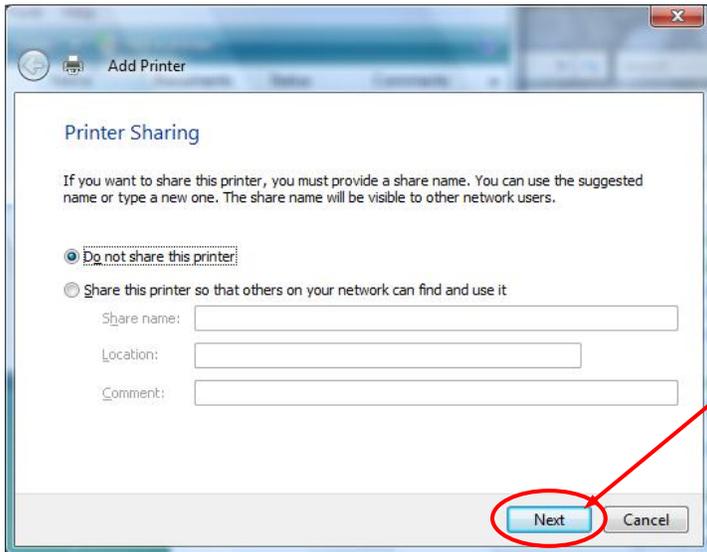

- k. Specify whether to share the printer, and then click the <Next> button.  
To not share the printer: Select <Do not share this printer>.  
To share the printer: Select <Share this printer so that others on your network can find and use it> and enter a <Share name>, <Location> and <Comment>.  
\*\* This window will only be displayed if <User Account Control (UAC)> is disabled.

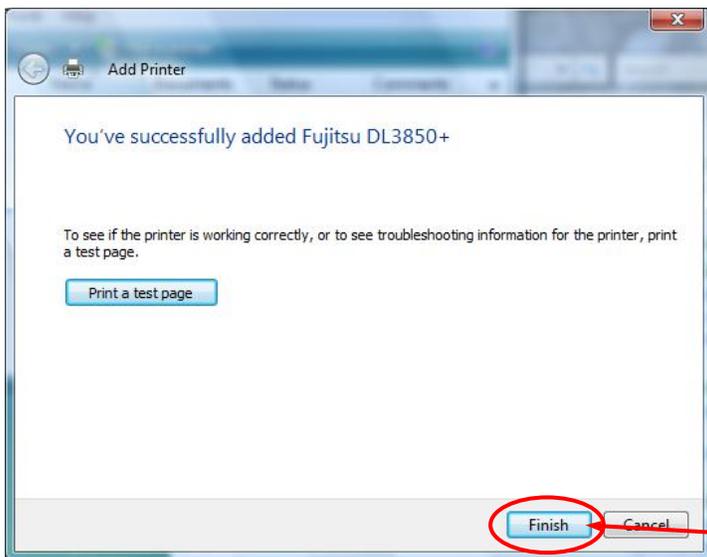

- l. Make sure that "You've successfully added FUJITSU DL3850+" is displayed, and then click the <Finish> button to end the wizard.  
The <Print a test page> button will be displayed, so print a test page if necessary.  
\*\* Make sure that the printer is online when printing test pages.  
\*\* Notes on printing test pages  
- Test pages are printed according to the current printer driver settings.  
- The default settings for the printer driver are "Automatically Select" for the paper feed method, and "Letter" for the paper size, so insert Letter-sized paper before printing the test page.  
- To use a non-default paper size, change the settings before printing the test page.

This completes the setup procedure for the printer driver. If the printer is set up using this method, the <Found New Hardware> window may be displayed when the computer is restarted. If this happens, perform the setup procedure again.